




Round Steel Link Chains for Hoists: DIN 5684-5, EN 818-7, tested, with test certificate

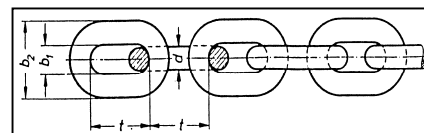

DIN 5684-5 (GK 5)

d x t [mm]	Inside Width b1 min. [mm]	Outside Width b2 max. [mm]	Lifting Capacity [kg]		Weight ca. [kg/m]
			motorised Hoists	manual Hoists	
4 x 12	4,8	13,6	250	320	0,35
5 x 15	6	17	400	500	0,54
6 x 18	7,2	20,4	600	750	0,8
7 x 21	8,4	23,8	800	1.000	1,1
8 x 24	9,6	27,2	1.000	1.250	1,4
9 x 27	10,8	30,6	1.250	1.600	1,8
10 x 28	12	34	1.600	2.000	2,2
11 x 31	13,2	37,4	2.000	2.500	2,7
13 x 36	15,6	44,2	2.650	3.350	3,7

EN 818-7, fine tolerance, Grade: T (Type: T, DAT)

Measurements d x t in [mm]	Inside Width b1 min. [mm]	Outside Width b2 max. [mm]	Lifting Capacity [kg]		Weight ca. [kg/m]
			T	DAT	
4 x 12	4,8	13,6	500	400	0,35
5 x 15	6	17	800	630	0,54
6 x 18	7,2	20,4	1.100	900	0,8
7 x 21	8,4	23,8	1.500	1.200	1,1
8 x 24	9,6	27,2	2.000	1.600	1,4
9 x 27	10,8	30,6	2.500	2.000	1,8
10 x 30	12	34	3.200	2.500	2,2
11 x 33	13,2	37,4	3.800	3.000	2,7
13 x 39	15,6	44,2	5.300	4.200	3,7

Other measures on request!

Technical changes subject to alterations. All specifications without engagement.