




**Sling Chains DIN 695, Grade 20,
with hooks or end links,
tested, with test certificate**

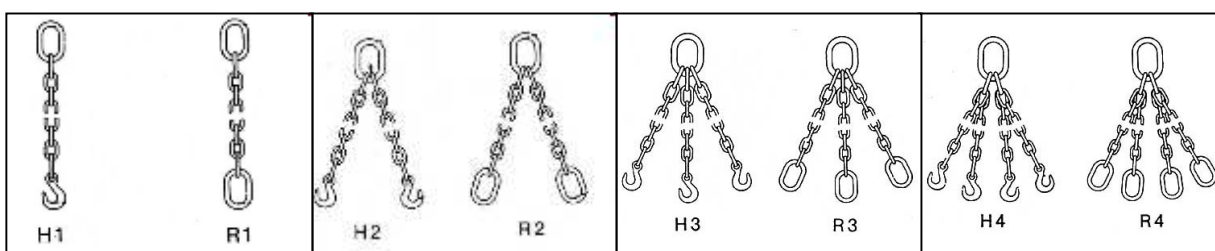

Chain (DIN 32891) d x t [mm]	Lifting Capacity [kg]				
	Single- Strand H1 – R1	Double-Strand H2 – R2		Triple- / Quadruple-Strand H3 – R3 / H4 – R4	
		45°	60°	45°	60°
6 x 18	320	450	320	670	475
8 x 24	630	900	630	1.320	950
10 x 30	1.000	1.400	1.000	2.120	1.500
13 x 39	1.600	2.240	1.600	3.350	2.360
16 x 48	2.500	3.550	2.500	5.300	3.750

Other Measures and types on request.

Technical changes subject to alterations. All specifications without engagement.