




Stainless Steel - Sling Chains

Hook- or Ring-ended Sling Chains, measures according to DIN 5688 Part 1, Grade 50, in welded fulfillment, tested, with test certificate

Chain material: 1.4571

Single Strand

Chain Size 6mm, Length Inside L [mm]	Lifting Capacity 750 kg	Chain Size 8mm, Length Inside L [mm]	Lifting Capacity 1.250 kg
1.000		1.000	
1.500		1.500	
2.000		2.000	
2.500		2.500	
3.000		3.000	
4.000		4.000	
5.000		5.000	
Chain Size 10mm, Length Inside L [mm]	Lifting Capacity 2.000 kg	Chain Size 13mm, Length Inside L [mm]	Lifting Capacity 3.200 kg
1.000		1.000	
1.500		1.500	
2.000		2.000	
2.500		2.500	
3.000		3.000	
4.000		4.000	
5.000		5.000	

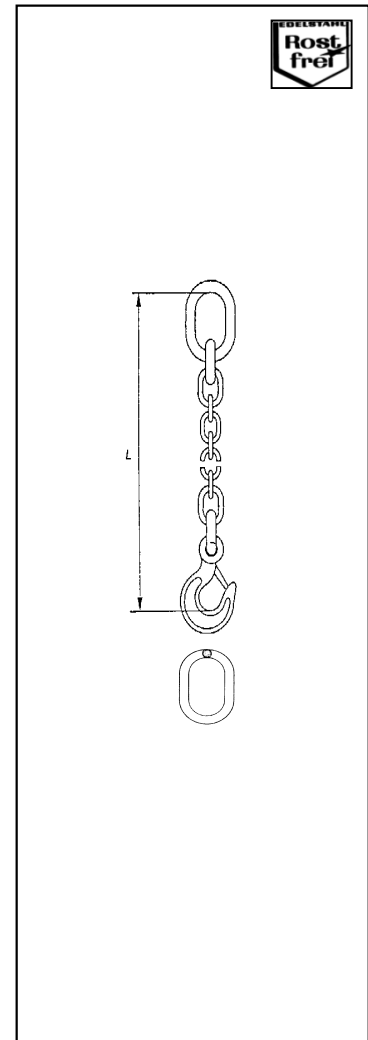

Minimum Length charged = 1.000 mm. Other varieties, measures and lengths on request.
All sling chains available with shortening device as well!




Stainless Steel - Sling Chains

Hook- or Ring-ended Sling Chains, measures according to DIN 5688 Part 1, Grade 50, in welded fulfillment, tested, with test certificate

Chain material: 1.4571

Double Strand

Chain Size 6mm, Length Inside L [mm]	Lifting Capacity	Chain Size 8mm, Length Inside L [mm]	Lifting Capacity
1.000	1.000 kg up to $\beta = 45^\circ$	1.000	1.700 kg up to $\beta = 45^\circ$
1.500		1.500	
2.000	750 kg up to $\beta = 60^\circ$	2.000	1.250 kg up to $\beta = 60^\circ$
2.500		2.500	
3.000		3.000	
4.000		4.000	
5.000		5.000	
Chain Size 10mm, Length Inside L [mm]	Lifting Capacity	Chain Size 13mm, Length Inside L [mm]	Lifting Capacity
1.000	2.800 kg up to $\beta = 45^\circ$	1.000	4.500 kg up to $\beta = 45^\circ$
1.500		1.500	
2.000	2.000 kg up to $\beta = 60^\circ$	2.000	3.200 kg up to $\beta = 60^\circ$
2.500		2.500	
3.000		3.000	
4.000		4.000	
5.000		5.000	

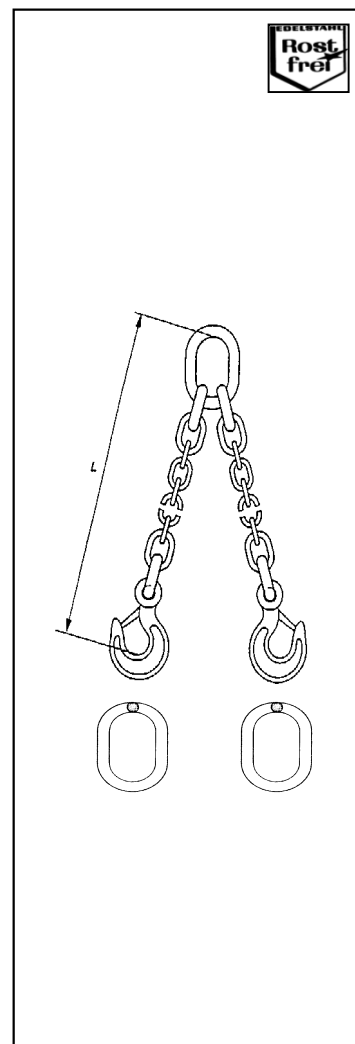

Minimum Length charged = 1.000 mm. Other varieties, measures and lengths on request.
All sling chains available with shortening device as well!




Stainless Steel - Sling Chains

Hook- or Ring-ended Sling Chains, measures according to DIN 5688 Part 1, Grade 50, in welded fulfillment, tested, with test certificate

Chain material: 1.4571

Quadruple Strand

Chain Size 6mm, Length Inside L [mm]	Lifting Capacity	Chain Size 8mm, Length Inside L [mm]	Lifting Capacity
1.000	1.600 kg up to $\beta = 45^\circ$	1.000	2.650 kg up to $\beta = 45^\circ$
1.500		1.500	
2.000	1.120 kg up to $\beta = 60^\circ$	2.000	1.800 kg up to $\beta = 60^\circ$
2.500		2.500	
3.000		3.000	
4.000		4.000	
5.000		5.000	
Chain Size 10mm, Length Inside L [mm]	Lifting Capacity	Chain Size 13mm, Length Inside L [mm]	Lifting Capacity
1.000	4.250 kg up to $\beta = 45^\circ$	1.000	6.700 kg up to $\beta = 45^\circ$
1.500		1.500	
2.000	3.000 kg up to $\beta = 60^\circ$	2.000	4.750 kg up to $\beta = 60^\circ$
2.500		2.500	
3.000		3.000	
4.000		4.000	
5.000		5.000	

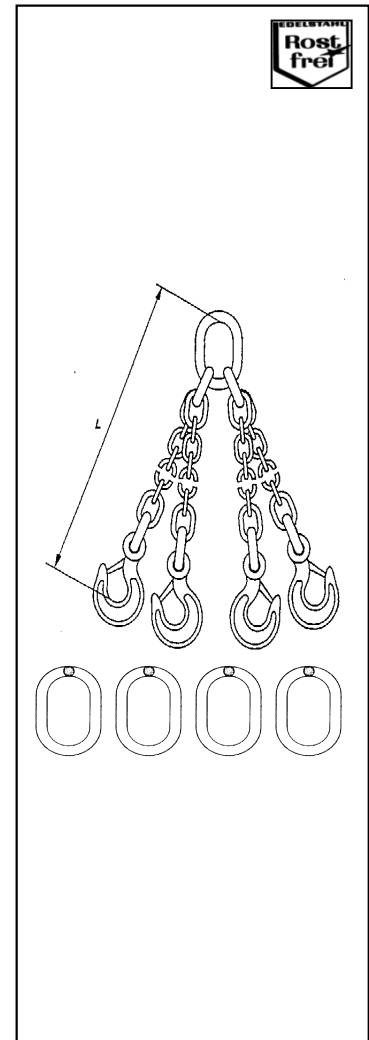


Minimum Length charged = 1.000 mm. Other varieties, measures and lengths on request.
All sling chains available with shortening device as well!



Stainless Steel - Sling Chain Components,


measures according to DIN 5688 Part 1, Grade 50

Suspension Link Form A1, Material 1.4571, for single-strand Sling Chains, polished

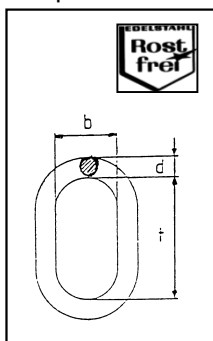


Chain (measures acc. DIN 766) [d x t]	Measures d x t x b [mm]	Lifting Capacity [kg]	Weight ca. [kg/piece]
6 x 18,5	13 x 110 x 60	1.000	0,34
8 x 24	16 x 110 x 60	1.250	0,53
10 x 28	18 x 135 x 75	2.000	0,80
13 x 36	22 x 160 x 90	3.125	1,50
16 x 45	26 x 180 x 100	5.000	2,30

Suspension Link Form A2, Material 1.4571, for double-strand Sling Chains, polished

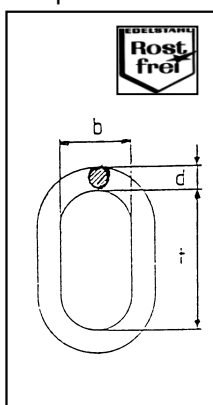

Chain (measures acc. DIN 766) [d x t]	Measures d x t x b [mm]	Lifting Capacity [kg] double-strand angle		Weight ca. [kg/piece]
		- 45°	- 60°	
6 x 18,5	13 x 110 x 60	1.000	750	0,34
8 x 24	18 x 135 x 75	1.700	1.250	0,80
10 x 28	22 x 160 x 90	2.800	2.000	1,50
13 x 36	26 x 180 x 100	4.500	3.200	2,30
16 x 45	32 x 200 x 110	7.100	5.000	3,90

Suspension Link Form B, Material 1.4571, for single- and double-strand Sling Chains, polished

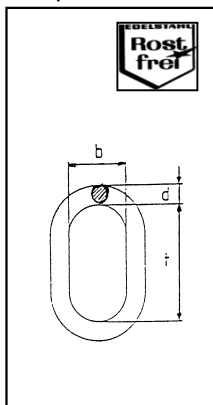


Chain (measures acc. DIN 766) [d x t]	Measures d x t x b [mm]	Lifting Capacity [kg] double-strand angle		Weight ca. [kg/piece]
		- 45°	- 60°	
6 x 18,5	7 x 35 x 16	1.000	750	0,03
8 x 24	10 x 44 x 20	1.700	1.250	0,10
10 x 28	13 x 54 x 25	2.800	2.000	0,20
13 x 36	16 x 70 x 34	4.500	3.200	0,30
16 x 45	20 x 85 x 40	7.100	5.000	0,70



Stainless Steel - Sling Chain Components,


measures according to DIN 5688 Part 1, Grade 50

Suspension Arrangements Form AK3-4, three-piece, Material 1.4571,
For triple- and quadruple-strand Sling Chains, polished

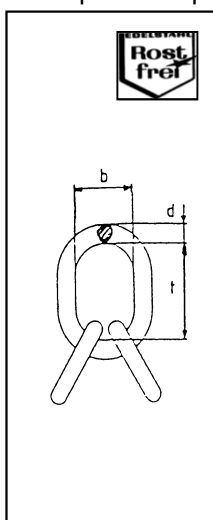

Chain Measures acc. DIN 766 [d x t]	Measures d x t x b [mm]	Lifting Capacity [kg] triple- / quadruple-strand angle - 45° - 60°		Weight ca. [kg/piece]
6 x 18,5	A 18 x 135 x 75 B 13 x 54 x 25	1.600	1.120	1,20
8 x 24	A 22 x 160 x 90 B 16 x 70 x 43	2.650	1.800	2,10
10 x 28	A 26 x 180 x 100 B 18 x 85 x 40	4.250	3.000	3,30
13 x 36	A 32 x 200 x 110 B 22 x 115 x 50	6.700	4.750	6,10

Lifting Hooks with Eye, Material 1.4571, with Safety Device (Material: 1.4301), polished

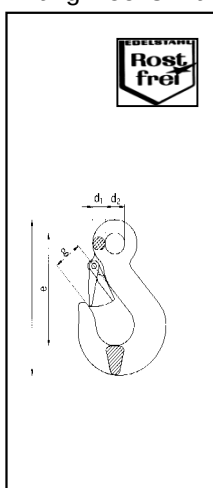

Chain Measures acc. DIN 766 [d x t]	Size DIN 7540	Measures [mm] d ₁ d ₂ e g l					Lifting Capacity [kg] quadruple-strand angle up to 45° up to 60°		Weight ca. [kg/piece]
6 x 18,5	Nr.21	10	16	85	24	117,5	1.600	1.120	0,35
8 x 24	Nr.23	13,5	20	116	33	160,5	2.650	1.800	0,80
10 x 28	Nr.25	16	26	138	39	190,5	4.250	3.000	1,40
13 x 36	on requ.	-	48	-	51	190	6.700	4.750	3,00

Other sizes and shortening devices on request!

Technical changes subject to alterations. All specifications without engagement.