




## Stainless steel shackles

- Surface polished
- Tested with test certificate
- Other sizes on request
- Material: 1.4401 or better

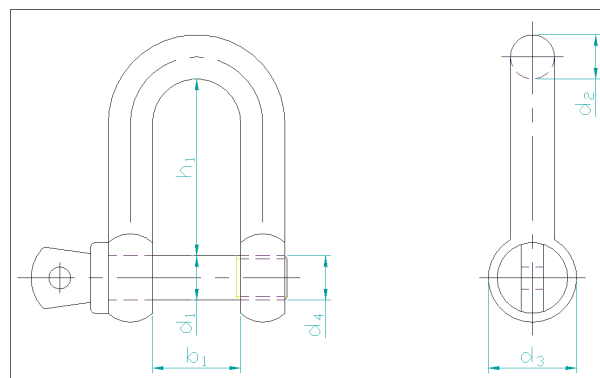

| d1<br>(+0/-0,5)<br>[mm] | WLL<br>[t] | b1<br>(+2,0/-1,0)<br>[mm] | d2<br>(+1,0/-1,0)<br>[mm] | d3<br>(+1,0/-1,0)<br>[mm] | d4  | h1<br>(+/-5,0)<br>[mm] | breaking<br>force min.<br>[kN] | weight<br>ca.<br>[kg/piece] |
|-------------------------|------------|---------------------------|---------------------------|---------------------------|-----|------------------------|--------------------------------|-----------------------------|
| 6                       | 0,40       | 13                        | 6                         | 12                        | M6  | 21                     | 16,0                           | 0,04                        |
| 8                       | 0,63       | 16                        | 8                         | 17                        | M8  | 32                     | 25,2                           | 0,06                        |
| 10                      | 0,90       | 20                        | 10                        | 20                        | M10 | 40                     | 36,0                           | 0,12                        |
| 12                      | 1,60       | 24                        | 12                        | 24                        | M12 | 47                     | 64,0                           | 0,2                         |
| 16                      | 2,50       | 32                        | 16                        | 32                        | M16 | 65                     | 100,0                          | 0,45                        |
| 20                      | 4,25       | 38                        | 20                        | 38                        | M20 | 66                     | 170,0                          | 0,81                        |
| 22                      | 6,30       | 45                        | 22                        | 45                        | M22 | 88                     | 252,0                          | 1,25                        |

Technical changes subject to alterations. All specifications without engagement.