




Stainless Round Steel Link Chains



Measures according to DIN 766 and ISO 4565 (anchor chains), DIN 32891, tested,
with test certificate,
Material AISI 304, AISI 316L, AISI 316Ti.
Other materials on request.

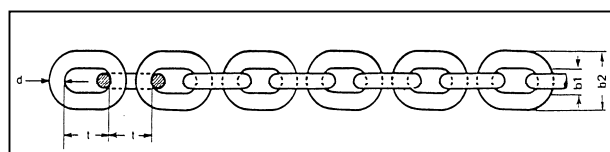

Size d [mm]	Inside Link Length t [mm]	Inside Width min. b1 [mm]	Outside Width max. b2 [mm]	Weight ca. [kg / m]	Lifting Capacity according to Grade 50 [kg]
-------------------	---------------------------------	---------------------------------	----------------------------------	---------------------------	---

DIN 766:

4	16	4,8	13,6	0,32	320
5	18,5	6	17	0,50	500
6	18,5	7,2	20,4	0,80	750
7	22	8,4	23,8	1,10	1.000
8	24	9,6	27,2	1,40	1.250
10	28	12	36	2,30	2.000
13	36	15,6	47	3,90	3.350
14	41	16,8	50	4,40	4.000
16	45	19,2	58	5,80	5.000

ISO 4565:

6	18	8,1	21,6	0,80	750
8	24	10,8	28,8	1,40	1. 250
10	30	13,5	36	2,20	2.000
12	36	16,2	43,2	3,20	3.350

DIN 32891:

16	48	21,5	57,6	5,70	5.000
----	----	------	------	------	-------

Surface: polished – on request electropolished.
Chain on request with end-link.

Technical changes subject to alterations. All specifications without engagement.